



Short Facts

Performance

Max diameter hardwood (in cm) (in cm)	27
Max diameter softwood (in cm) (in cm)	32
Output approx. (in srm)	60
Power requirement (in kW)	-

Intake opening

Feeding width (in mm)	800
Feeding height (in mm)	320

Grinding unit

Rotor diameter (in mm)	520
Number of blades (half / full equipment) (in cm)	16

Material outfeed

Blower outfeed	-
Conveyor belt outfeed	-

Main drive

Diesel engine	-
Electric motor	-
(in kW/PS)	50 Hz, IP 54, 400V

Carriage

Number of axles	-
Top speed (in km/h)	-

Weight (without crane)

Weight basic model (in kg)	4500
Permitted axle load (in kg)	-
Permitted support load (in kg)	-
Permitted total weight (in kg)	-


Measurements transport position

Length (in mm)	4000
Width (in mm)	1580
Height (in mm)	1610

Control system

easygreen	-
DIP	-
Sensotronic	-
Automatic overload control unit	✓
Infeed speed stepless adjustable	-
Wire-remote control	-
15-channel remote control	-
Z-Tronic	-

HE 360 StA

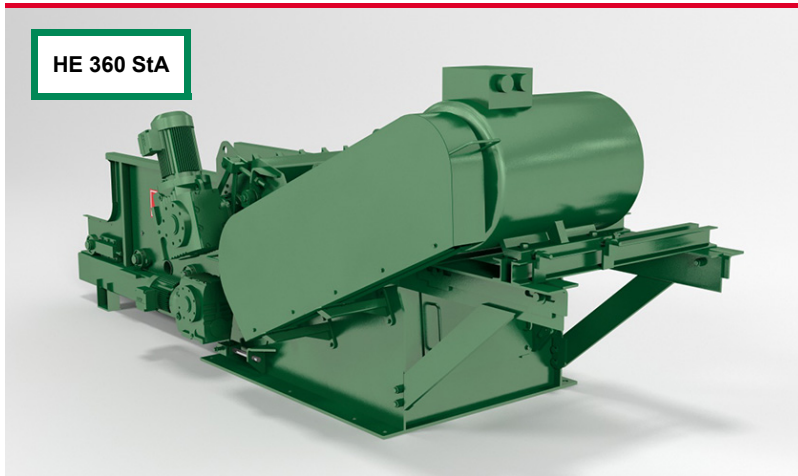

Application

- trunk wood up to approx. 320 mm diameter
- stationary application in small plants

Specifics

- smallest stationary chipper from JENZ
- Driven by electronic engine
- low space requirement
- proven intake technology from the mobile chipper technology
- Different infeed lengths
- Different discharge lengths
- individual installation

JENZ GmbH Maschinen- und Fahrzeugbau

Wegholmer Str. 14
D-32469 Petershagen

Tel.: +49 (0) 5704/9409-0
E-Mail: info@jenz.de