



LAND CLEARING Tracked Carriers





5 MAKE THE DIFFERENCE

6 ABOUT FAE

8 TRACKED CARRIERS

12 PT-175 - *New*

32 PT-300 - *New*

54 PT-475





MAKE THE **DIFFERENCE**

At FAE, every machine, accessory and optional component is designed with utmost precision, the highest quality materials and the most advanced technology.

Each detail is designed to make the execution of the tasks as quick and efficient as possible and for the specific applications, conditions and environment where it will be carried out.

Every FAE machine and accessory was created to make a difference at work and, given the importance of many of the applications we work on, for the planet. This is why each member of our team, each partner and customer works daily.





ABOUT **FAE**

With a range of over 90 products and 400 models, FAE can meet the most diverse demands for forestry, agricultural, road construction, building and demining applications. The FAE product range includes heads for tractors, excavators, skid steer loaders, special vehicles and tracked vehicles, with cabins or remote controlled. FAE was founded in 1989, and the company's main office is still located in Fondo, Italy. Production, sales, after-sales service and parts services are handled by our 4 production sites, the main office, 6 commercial branches and a network of authorized dealers all over the world.

GLOBAL QUALITY

Our precision design and production processes use advanced technologies to ensure long-term performance and reliability.

CONSTANT INNOVATION

We design unique and cutting-edge products based on customer's specific needs for solutions that pave the way to the future.

COMPLETE PRODUCT LINE

We offer an extensive product range and a high degree of customization to make each process more efficient, more productive, and easier.

TOTAL SUPPORT

We make our vast range of machines, dedicated accessories and components, as well as our technical assistance available worldwide.

LAND CLEARING **TRACKED CARRIERS**

FAE tracked carriers are great for forestry and agricultural work. The many interchangeable heads available make these carriers extraordinarily flexible. FAE PTs are designed and built to work under extreme conditions, with maximum productivity and reliability.





A TRACKED CARRIER THAT FITS ALL NEEDS

The FAE PT line offers three models, each with a wide selection of specific options to meet every operational need.



PT-175

The compact, powerful tracked carrier.



PT-300

The tracked carrier that is ready for anything.



PT-475

The tracked carrier for big challenges.

MODEL	100 hp	200 hp	300 hp	400 hp	500 hp
PT-175		173 hp			
PT-300			302 hp		
PT-475				475 hp	

FAE PT-175

THE COMPACT, POWERFUL TRACKED CARRIER.

The FAE PT-175 is a tracked carrier designed for forestry work when there is little space to maneuver anywhere that requires superior agility and efficiency. Manage wooded areas, create firebreaks, work near power lines, oil and gas pipelines. The sturdy construction with oscillating undercarriage is the best match for the 140/U mulcher. The exclusive Sonic system increases mulching efficiency to achieve maximum productivity with minimum fuel consumption. The engine power and low operating weight of the CAT C4.4 Acert makes it possible to work on steep slopes and soft ground. The hydraulic system guarantees reliability and efficiency. The spacious cab is unrivaled when it comes to comfort, ergonomics and operator safety.

POWERFUL

The flexibility and reliability of one of the world's most popular four-cylinder engines. The Caterpillar C4.4 Tier 4 Final/Stage V engine delivers 173 hp, with reliably superior performance and a global service network.

NIMBLE

Managing steep, soft, uneven ground with little space to maneuver is normal for FAE PT-175. Longitudinal slopes of 45° and transverse slopes of 32°. High power, low operating weight. Minimum pressure against the ground: 0.28 kg/cm².

TECHNOLOGICAL

High-tech body and soul. An integrated system developed by FAE to ensure maximum performance. With a network of sensors to monitor key operating parameters, everything in the PT-175 can be easily fine-tuned.

COMFORTABLE

Designed with total operator comfort in mind. ROPS/FOPS/OPS cabs - the industry benchmark. High Lexan™ windows. Ergonomic joysticks. Pneumatic seat. 7" color display to monitor and modify all operating functions.



PRODUCTIVE

PT-175 was created with a clear objective in mind: to optimize forestry work. The FAE 140/U/SONIC mulcher helps you easily manage woods and forests and create firebreaks near electric lines, oil and gas pipelines. The exclusive Sonic system increases mulching efficiency to achieve maximum productivity with minimum fuel consumption.

AN ENGINE THAT'S ALWAYS READY TO GO

You can count on the FAE PT-175 engine. The **Caterpillar C4.4 Acert** four-cylinder is a popular engine, highly respected worldwide. Equipped with twin turbochargers with after cooler, Acert technology and Common Rail injection, this engine delivers an impressive 173 hp. Efficient, reliable, with superb consumption/power ratio.


Compliance with the **Tier 4 Final/Stage V** standard is guaranteed with the combination of diesel particulate filter (DPF), selective catalytic reduction (SCR) and diesel oxidation catalyst (DOC) technologies.

A combination that maximizes uptime and requires minimal maintenance over time, achieved by passive regeneration that does not require interrupting the work.

The 4.4-liter displacement and a cooling system designed specifically for the FAE PT-175 ensure peak performance in heavy-duty applications and when working in tropical climates.



The simple, uncluttered **internal layout** is synonymous of reliability

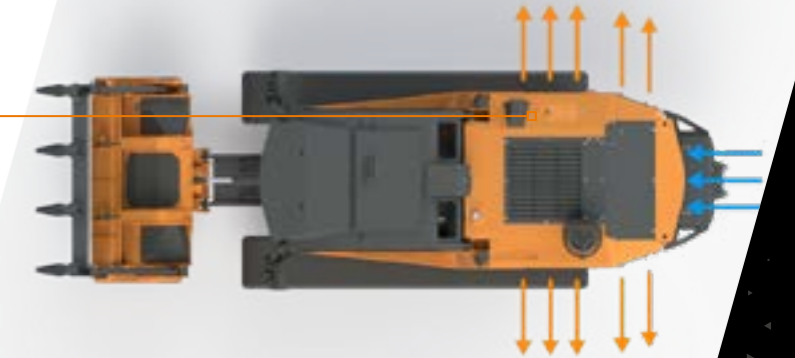

Optimized airflow for working in extreme conditions

Easy access to **filters** makes maintenance quick and easy



EFFICIENT, RELIABLE TRANSMISSION.



The transmissions designed for the FAE PT-175 are based on two fundamental concepts: technology and integration. **Electronically-controlled pumps and sensors and a dedicated control unit**, working together to deliver maximum performance. The systems are designed to enable the CAT C4.4 Acert engine to operate at optimal rpms at all times.

The FAE PT-175's **hydrostatic transmission** also serves to dampen operating loads. This ensures that

the carrier and its key components are subjected to less stress, reducing wear and tear. The end result is greater durability than a mechanical transmission.

The FAE PT-175's **integrated load control feature** optimizes power management, ensuring that the mulcher always operates at peak power while reducing forward speed as needed.

Diagram of the FAE PT-175 **hydrostatic transmission**: simple and effective

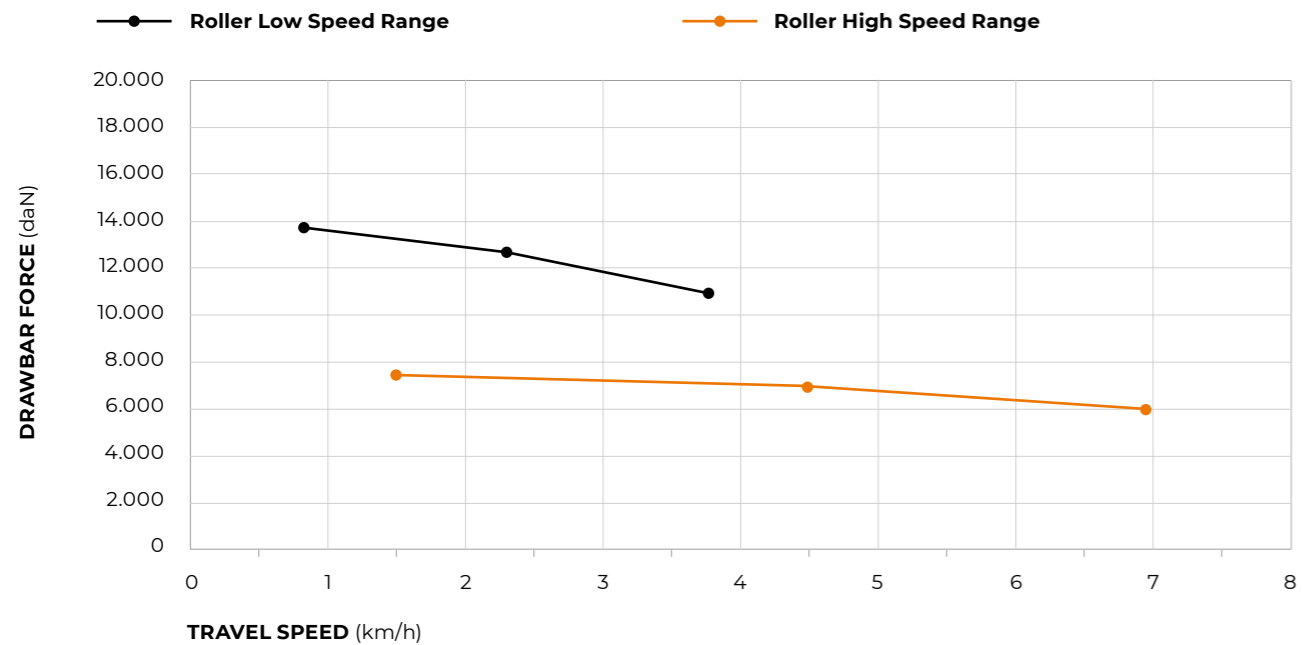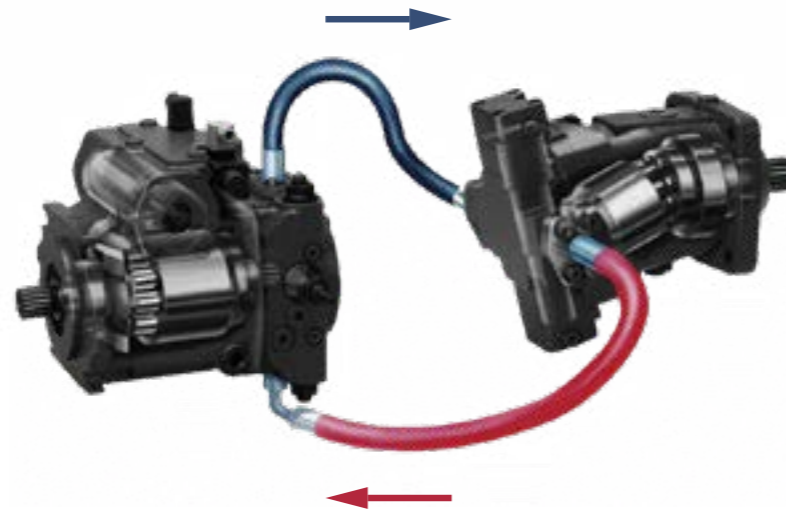

TRAVEL SPEED (km/h)

NOTE: Usable force will depend upon: machine weight, permitted traction, working duty cycle



- 1 Horn
- 2 High gear selector
- 3 Low gear selector
- 4 Variable gear speed increase / decrease
- 5 Windshield wipers / Pneumatic cleaning system activation

The traction force can be controlled precisely and safely with the **trackball on the joystick**


HEAVY DUTY UNDERCARRIAGE.

The FAE PT-175 undercarriage is designed to provide maximum operating performance and reliability, even in the most demanding conditions.

Prime quality **Berco components**. Chains with lifetime lubrication offer longer life than conventional chains as well as greater operator comfort. Solid, reliable dozer-type rollers. **Oscillating undercarriage technology** for superior traction and comfort. Two options available for roller guards to better adapt to different working environments.

Conventional geometry ensures a **low center of gravity** and provides **optimal contact between chain and drive wheel**. Two fundamental elements for the best possible work, even on slopes. The FAE PT-175 wheelbase also extends the area over which the load is distributed, which means **lower specific pressure against the ground**.

The frames of the PT-175 undercarriage are designed to withstand major stresses and make maintenance easier.

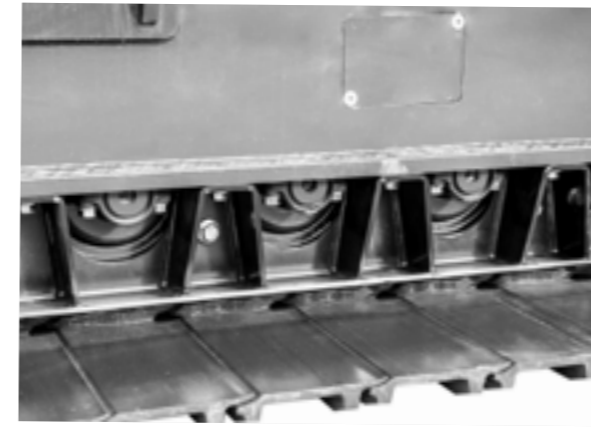


Solid rock guards

2 **slide** configurations to adapt to any terrain



Single grouser - 500 mm (Standard)

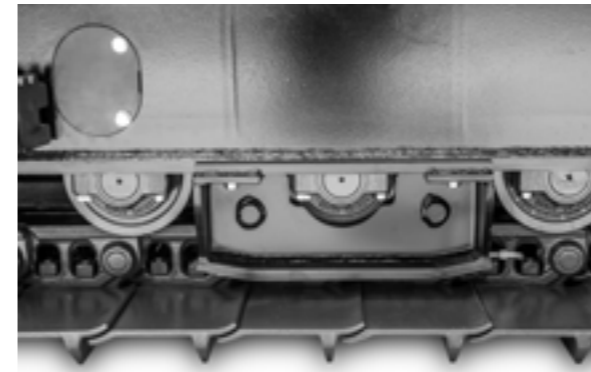

Chain guide



Single grouser - 700 mm (Option)



Oscillating **undercarriage technology** boosts grip and comfort

A SERIOUSLY COMFORTABLE CAB.

The cab of the FAE PT-175 is designed for those who work in extreme conditions. It is ergonomic, soundproof and guarantees optimal visibility, making it an industry benchmark.

Joysticks built into the pneumatic suspension seat allow for easy, precise operation of the PT-175. The controls on the side console are distributed to make them user friendly, and the 7" color display keeps the essential carrier parameters in view at all times.

ROPS/FOPS/OPS certification meets the highest standards of operator safety, even in the most demanding applications. The air conditioning system vents located throughout the cabin provide all the comfort the operator needs, in hot or cold weather. An optional cabin pressurization system is also available.

The large, **12-mm thick, impact and scratch-resistant Lexan™ windows** provide excellent visibility. Powerful LED work lights offer broad coverage, ensuring precise, safe work in all conditions.

Each and every item in the cabin has been carefully **designed with ergonomics in mind.**



7" electronic color **display**



User-friendly side **console**



Powerful **air conditioning system**



Optional **rear view camera**



EASY TO USE, EASY TO MAINTAIN.

Everything about the FAE PT-175 is designed to be effortless, from operation to maintenance.

Access to the engine compartment is easier with the **large doors with shock-resistant closures**. The compartment is also protected by micro-

perforated plates that prevent material from getting inside. Accessing the filters, tanks and hydraulic system components is easier with the large engine compartment and its organized interior layout. The large doors and **tilting cab** ensure easy maintenance, whether checking fluid levels or running

routine checks and more. In addition, a **heavy duty kit** can be installed to add an extra degree of air filtration and extend the life of the engine air filter.

The PT-175's efficient cooling system comes standard with a **radiator with anti-clogging fins**

specially designed by FAE. It can also be integrated with reversible, proportional fans that ensure peak performance and maximize radiator core cleanliness. In fact, the fans are regulated by the machine's control unit, adjusting the tilt of the blades according to the operating temperature. This optimizes airflow and also saves fuel.



Level control is simplified by an organized layout (1)




The **large rear doors** have safety catches (2)



Fluid level indicators are clear and easy to locate (3)



A **reversible fan** maximizes radiator efficiency (4)



Couplings make it possible to quickly **drain fluids** without leaks (5)



FORESTRY MULCHERS FOR SPECIAL VEHICLES

140/U/SONIC

Hydraulic mulcher with Sonic technology.

The 140/U/SONIC is the smallest model in the product line. Its small size makes it ideal for clearing corridors in the woods for seismic surveys and oil exploration. The sturdy frame means it can be used with tracked vehicles.



Sonic System



Ø 25 cm max



STUMP CUTTERS FOR SPECIAL VEHICLES

200/SC

Hydraulic stump cutters.


The 200/SC can shred large stumps and roots up to 50 cm depth. The hydraulic and proportional swing control allows to work on wide surfaces without moving the vehicle.



Ø 50 cm max



Depth 50 cm

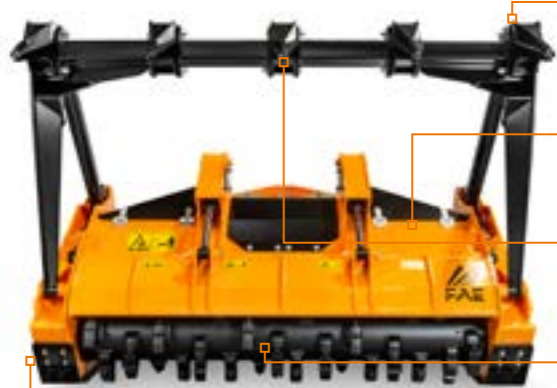

Mechanical or hydraulic push frame (optional)

Hydraulically controlled hood to adjust final product size

Ripper teeth for the push frame (optional)

Possibility to have optional rotors and tooth

Adjustable skids



Hydraulic and proportional swing control

VT hydraulic motor and Block valves with double relief and anti-cavitation valves

Auxiliary and support blade for better grinding performance

Poly Chain belt transmission optimal power management

Interchangeable protection chains with safely deflects debris limit the escape of the shredded material

MODEL	140/U/SONIC 175
Head type	Mulcher
Working width (mm)	1827
Total width (mm)	2171
Weight (kg)	1700
Rotor diameter (mm)	450
Max shredding diameter (mm)	250
No. teeth type C/3+C/3/SS	38+4
type I + C/3/SS	54+2
No. blades type BL + C/3/SS	30+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MODEL	200/SC
Head type	Stump cutter
Working width max range (mm)	1200
Blade width (mm)	1127
Weight (Kg)	1755
Disc rotor diameter (mm)	815
Disc rotor width (mm)	160
Max working depth (mm)	500
Max shredding diameter (mm)	500
No. teeth type M/1+M/2+M/3+M/4	12+3+12+3

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE C



ROTOR TYPE I



ROTOR BL



ROTOR DISC



BLADE FOR SPECIAL VEHICLES

Dozer Blade

Eight-way dozer blade with heavy-duty structure and 2400 mm width. Designed for rough and finish grading in dirt and leveling, the FAE Dozer blade features interchangeable Hardox® wear-resistant cutting edges, a guarantee of resistance and reliability. Thanks to the hydraulic control of the movements, the blade can reach 15° of angle and 10° of side-tilt in both directions. The hydraulic system is equipped with relief valves to protect it from overload in the angle and side-tilt movements.



MOVEMENTS RANGE



1. Side-tilt



2. Lift



3. Front-tilt



4. Angle

The 8-way movement allows side-tilting (1), lifting/lowering (2), front-tilting (3) and angle (4) the blade, all from the vehicle cabin.

TECHNICAL SPECIFICATIONS



MODEL	Dozer Blade
A. Blade width (mm)	2400
B. Width fully angled (mm)	2320
C. Moldboard height (mm)	970
D. Overall length with attachment plate (mm)	640
E. Blade angle	±15°
F. Center blade-left edge distance (when fully angled) (mm)	1055
G. Center blade-right edge distance (when fully angled) (mm)	1265
H. Blade side-tilt	±10°
Weight (kg)	1340
Moldboard thickness (mm)	15

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

PT-175

TECHNICAL SPECIFICATIONS.




173 hp | TIER 4 FINAL / STAGE V

STANDARD EQUIPMENT

After-treatment system DOC/DPF/SCR	Comfort driver's seat (heated and air suspended)
Engine CAT C4.4 Acert turbocharged and after-cooled	Ergonomic joysticks controls
Hydrostatic tracks transmission	Heating & Air conditioning systems
Hydrostatic attachments transmission	Double emergency exit and roof escape external access handle
Basic Load Control function	Lexan® cabin windshields (full equipped 12 mm)
Oscillating style H-frame	Cabin air filtration dust proofing
Oscillating undercarriage	LCD color 7" display
500 mm steel track pads, single grouser, lubricated track chain, dozer-style rollers	MP3/CD bluetooth radio player
Combined aluminum cooler anti-clogging fins style	LED working lights
Cabin ROPS/FOPS/OPS-approved	Sonic System

DIMENSIONS

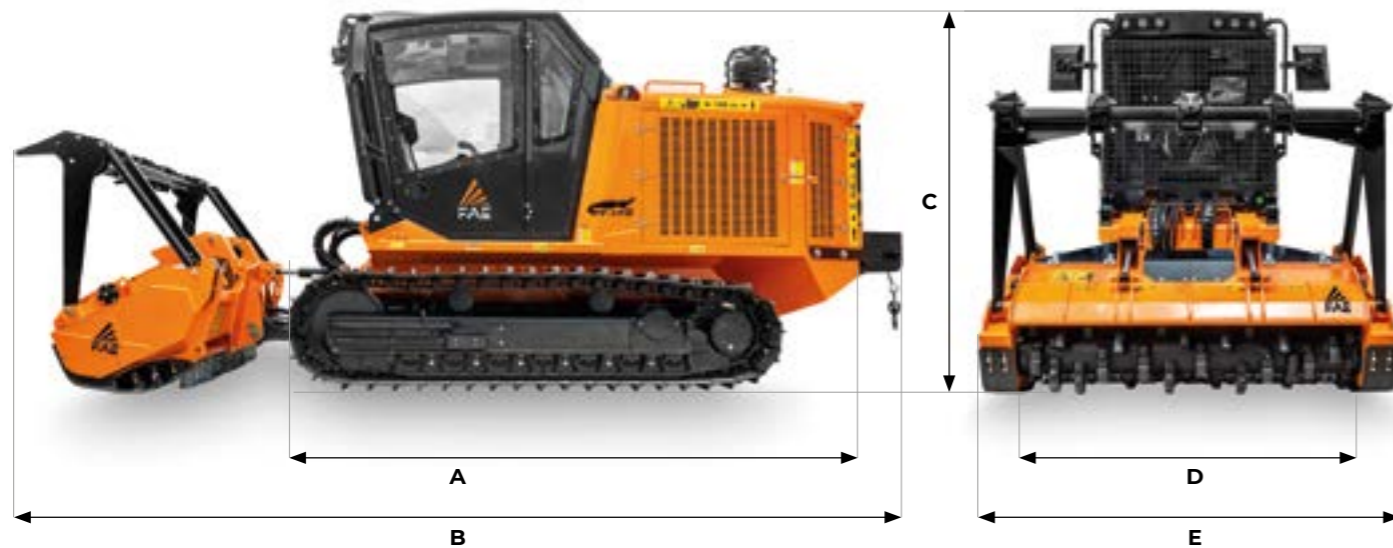

A Overall length without attachment	4518 mm	C Max height	2654 mm
B Transport length with 140/U/SONIC attachment on ground and winch	6422 mm	D Overall track width	2050 mm (with 500 mm pads)
		E See attachments table	

PT-175 T4F

Engine Gross Power	173 hp
Engine Emission	U.S. EPA Tier 4 Final / EU Stage V
Travel Pumps	2 - EP control - 60 cc - Danfoss
Travel Motors	2 - HY control - 60 cc - Rexroth
Max Travel Pressure	420 Bar
Attachment Pump	1 - EP control - 100 cc - Danfoss
Max Mulcher Pressure	350 Bar
Hydraulic Oil Tank Capacity	230 L
Fuel Tank Capacity	250 L
DEF AdBlue® Tank	19 L
Track Chain	155 Pitch - Lubricated - Berco (std equipment with 500 mm pads)
Lower Rollers	7 + 7 Single Flange
Carrier Rollers	2 + 2
Voltage	24 volt
Max forward speed	7 Km/h
Max reverse speed	7 Km/h
Gradeability	45° vertical, 32° lateral
Operating weight	8589 Kg (std equipment with 500 mm pads) 8905 Kg (std equipment with 700 mm pads)
Ground Pressure	0,28 Kg/cm² (std equipment / 700 mm pads / 140/U-175)

ATTACHMENT

MODEL	140/U/SONIC 175	200/SC
Head type	Mulcher	Stump cutter
Working width (mm)	1827	-
Working width max range (mm)	-	1200
Blade width (mm)	-	1127
Total width (mm)	2171	-
Weight (Kg)	1700	1755
Rotor diameter (mm)	450	-
Disc rotor diameter (mm)	-	815
Disc rotor width (mm)	-	160
Max working depth (mm)	-	500
Max shredding diameter (mm)	250	500
No. teeth type C/3+C/3/SS	38+4	-
type I + C/3/SS	54+2	-
No. teeth type M/1+M/2+M/3+M/4	-	12+3+12+3
No. blades type BL + C/3/SS	30+2	-

TEETH

140/U/SONIC 175		200/SC	
ROTOR C	ROTOR I	ROTOR BL	DISC ROTOR
C/3 (standard)	I (option)	BLADE BL (option)	M/1 (standard)
C/3/HD (option)			M/2 (standard)
K/3 (option)			M/3 (standard)
BLADE BL (option)			M/4 (standard)
STCL/3 (option)			
C/3/SS (left/right) (side scraper)	C/3/SS (left/right) (side scraper)	C/3/SS (left/right) (side scraper)	

OPTIONS

OPTIONS


Rear winch - rated towing capacity: 6t	Chain guides
Protective roof	Rock guards
Cabin pressurization system	Proportional and reversible radiator fan
Protective Windshield Grill	Ejector (heavy duty filtration package)
Rear view camera with additional LCD display (visibility package)	Drainage filter (heavy duty filtration package)
Additional lighting package (visibility package)	Pre-heating system for engine and hydraulic oil
Service light (service package)	Air shut-off system
Oil top-off pump (service package)	Forestry protections kit (Cabin side windows protection grids + Engine bay doors protections)
700 mm steel track pads - single grouser	




Service light (service package)




Oil top-off pump (service package)

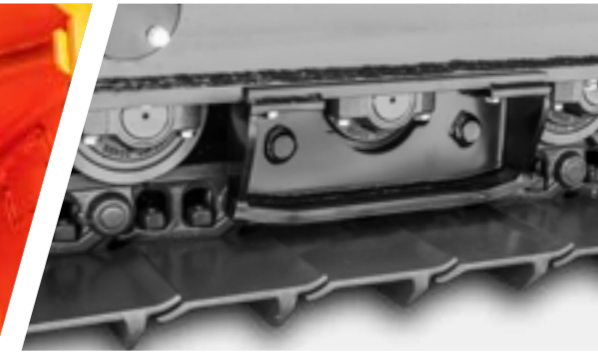

Chain guides

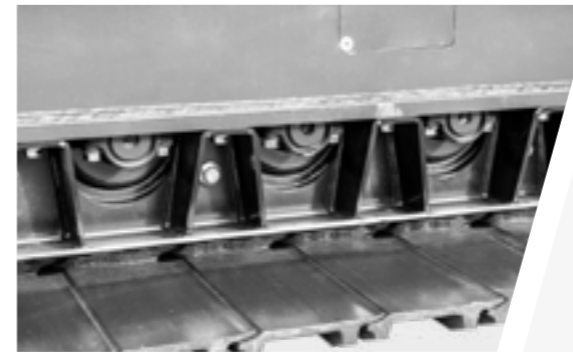

Rock guards

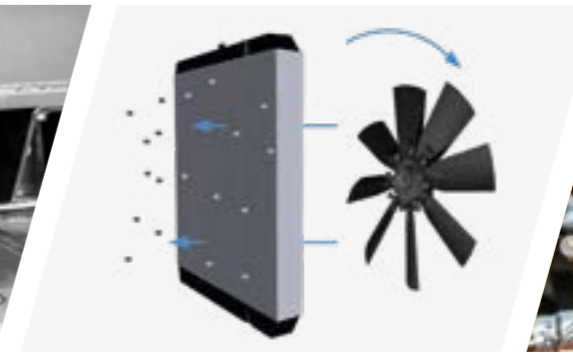

Proportional and reversible radiator fan



Ejector (heavy duty filtration package)



Rear winch - rated towing capacity: 6t



Canopy



Cabin pressurization system



Drainage filter (heavy duty filtration package)



Pre-heating system for engine and hydraulic oil



Air shut-off system



Protective Windshield Grill



Rear view camera with additional LCD display (visibility package)



Additional lighting package (visibility package)



Forestry protections kit (Cabin side windows protection grids + Engine bay doors protections)



700 mm steel track pads - single grouser

FAE PT-300

THE TRACKED CARRIER THAT IS READY FOR ANYTHING.

The FAE PT-300 is the ideal tracked carrier for the most difficult tasks, whether managing woods and forests or creating firebreaks near electrical lines, oil and gas pipelines. Its solid structure with oscillating undercarriage make it compatible with a wide variety of FAE hydraulic units: forestry mulchers, cutters, stone crushers, stump cutters and dozer blades. The high-power CAT C7.1 Acert inline six-cylinder engine with low operating weight makes it possible to work on steep slopes and soft ground. The hydraulic system guarantees reliability and efficiency. The spacious cab is unrivaled when it comes to comfort, ergonomics and operator safety.

POWERFUL

The flexibility and reliability of one of the world's most widely used inline six-cylinder engines. The Caterpillar C7.1 Tier 4 Final/Stage V engine delivers 302 hp, while the Tier 3/Stage III A version provides 275 hp. Always top-notch performance supported by a global service network.

NIMBLE

The FAE PT-300 takes working on steep, soft, uneven and swampy terrains in stride. Vertical slopes of 45° and lateral slopes of 35°. High power, low operating weight. Minimum pressure against the ground: 0.29 kg/cm².

TECHNOLOGICAL

High-tech body and soul. An integrated system developed by FAE to ensure maximum performance. With a network of sensors to monitor key operating parameters, everything in the PT-300 can be easily fine-tuned.

COMFORTABLE

Designed with total operator comfort in mind. ROPS/FOPS/OPS cabs - the industry benchmark. High Lexan™ windows. Ergonomic joysticks. Pneumatic seat. 7" color display to monitor and modify all operating functions.



VERSATILE

Born flexible. The construction features of the FAE PT-300 enable it to accommodate forestry mulcher (also with exclusive Sonic technology), stump cutters and dozer blades. Always the ideal configuration to manage woods and forests as well as create firebreaks near electrical lines, oil and gas pipelines.

AN ENGINE THAT'S ALWAYS READY TO GO

You can count on the FAE PT-300 engine. The **Caterpillar C7.1 Acert** inline six-cylinder engine is one of the world's most popular and highly respected engines. Equipped with twin turbochargers with after cooler and Acert technology, the Tier 4 Final/ Stage V version of this engine delivers an impressive 302 hp. Efficient, reliable, with superb consumption/ power ratio.

Compliance with the **Tier 4 Final/Stage V** standard is guaranteed with the combination of diesel particulate filter (DPF), selective catalytic reduction (SCR) and diesel oxidation catalyst (DOC) technologies.

A combination that maximizes uptime and requires minimal maintenance over time, achieved by passive regeneration that does not require interrupting the work.

The FAE PT-300 is also available in a **Tier 3 / Stage III A** version for emission-free markets, rated at 275 hp.


The generous 7-liter displacement and a cooling system designed specifically for the FAE PT-300 ensure that both configurations can offer peak performance in both heavy-duty applications and when working in tropical climates.



Engine
Tier 4 Final / Stage V



The simple, uncluttered **internal layout** is synonymous of reliability

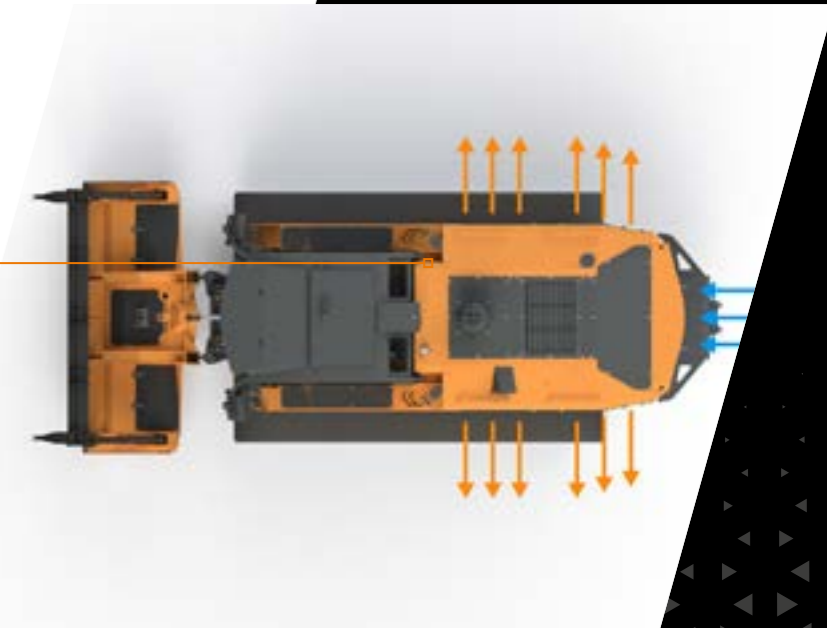

Optimized airflow for working in extreme conditions



Easy access to **filters** makes maintenance quick and easy

EFFICIENT, RELIABLE TRANSMISSION.

The transmissions designed for the FAE PT-300 are based on two fundamental concepts: technology and integration. **Electronically-controlled pumps and sensors and a dedicated control unit**, working together to deliver maximum performance. The systems are designed to enable the CAT C7.1 Acert engine to operate at optimal rpms at all times.



The FAE PT-300's **hydrostatic transmission** also serves to dampen operating loads. This ensures that the carrier and its key components are subjected to less stress, reducing wear and tear. The end result is greater durability than a mechanical transmission.

An added benefit of the FAE PT-300's hydrostatic transmission is that they can accommodate a **wide variety of dedicated FAE equipment** such as forestry mulchers, stump cutters, stump grinders and dozer blades.

The PT-300 can be equipped with **Active Power Management**, an intelligent FAE system that automatically manages vehicle advancement in relation to the force absorbed by the rotor. This feature also helps the machine automatically adapt to the contour of the terrain. The operator can now concentrate on the job at hand, for higher productivity.



Diagram of the FAE PT-300 **hydrostatic transmission**: simple and effective

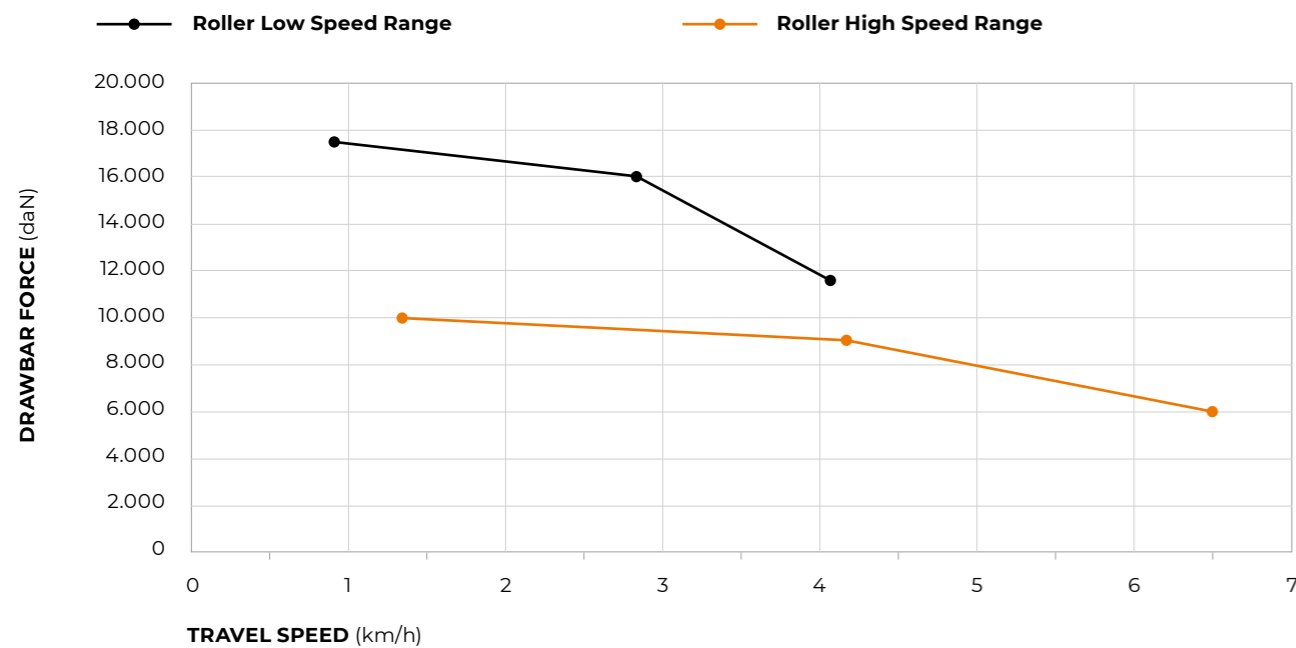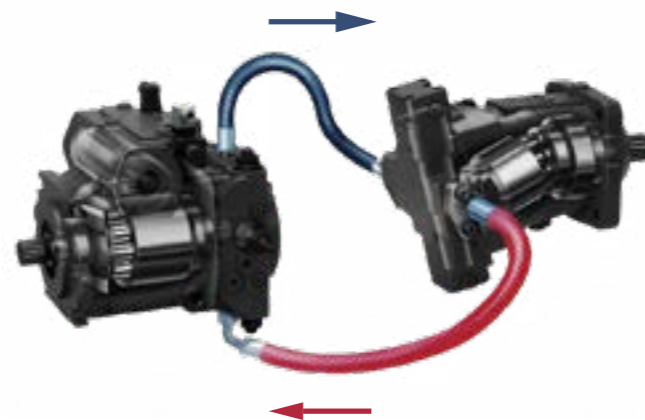

NOTE: Usable force will depend upon: machine weight, permitted traction, working duty cycle



- 1 Horn
- 2 High gear selector
- 3 Low gear selector
- 4 Variable gear speed increase / decrease
- 5 Windshield wipers / Pneumatic cleaning system activation

The traction force can be controlled precisely and safely with the **trackball on the joystick**


HEAVY DUTY UNDERCARRIAGE.

The FAE PT-300 undercarriage is designed to provide maximum operating performance and reliability, even in the most demanding conditions.


Prime quality **Berco components**. Chains with lifetime lubrication offer longer life than conventional chains as well as greater operator comfort. Solid, reliable dozer-type rollers. Oscillating undercarriage technology for superior traction and comfort. Two options available for roller guards to better adapt to different working environments.

Conventional geometry ensures a **low center of gravity** and provides **optimal contact between chain and drive wheel**. Two fundamental elements for the best possible work, even on slopes. The FAE PT-300 wheelbase also extends the area over which the load is distributed, which means **lower specific pressure against the ground**.

The frames of the PT-300 undercarriage are designed to withstand major stresses and make maintenance easier.

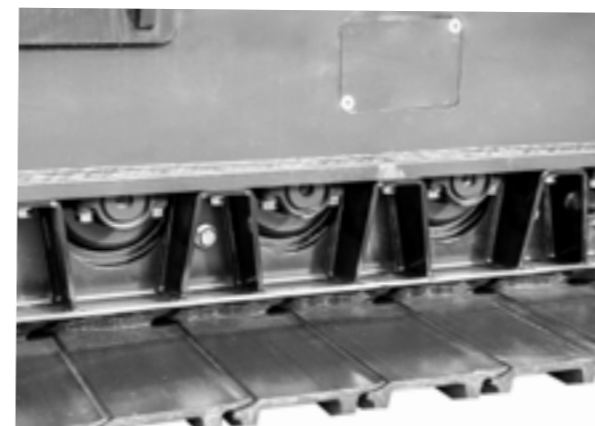

Solid **rock guards**

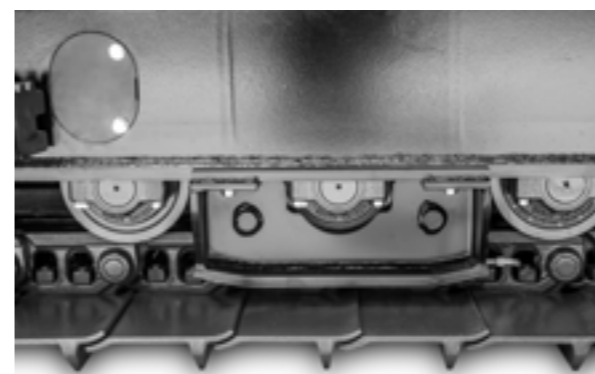

Chain **guide**

3 **slide** configurations to adapt to any terrain



Double grouser - **800 mm (Option)**



Single grouser - **660 mm (Standard)**



Single grouser - **800 mm (Option)**



Oscillating **undercarriage technology** boosts grip and comfort

A SERIOUSLY COMFORTABLE CAB.

The cab of the FAE PT-300 is designed for those who work in extreme conditions. It is ergonomic, soundproof and guarantees optimal visibility, making it an industry benchmark.

Joysticks built into the pneumatic suspension seat allow for easy, precise operation of the PT-300. The controls on the side console are distributed to make them user friendly, and the 7" color display keeps the essential carrier parameters in view at all times.

ROPS/FOPS/OPS certification meets the highest standards of operator safety, even in the most demanding applications. The air conditioning system vents located throughout the cabin provide all the comfort the operator needs, in hot or cold weather. An optional **cabin pressurization system** is also available.

The large, **12-mm thick, impact and scratch-resistant Lexan™ windows** provide excellent visibility. Powerful LED work lights offer broad coverage, ensuring precise, safe work in all conditions.

Each and every item in the cabin has been carefully **designed with ergonomics in mind.**



7" electronic color **display**



User-friendly side **console**



Powerful **air conditioning system**



Optional **rear view camera**



EASY TO USE, EASY TO MAINTAIN.

Everything about the FAE PT-300 is designed to be effortless, from operation to maintenance.

Access to the engine compartment is easier with the **large doors with shock-resistant closures**. The compartment is also protected by micro-perforated plates that prevent material from getting

inside. Accessing the filters, tanks and hydraulic system components is easier with the large engine compartment and its organized interior layout. The large doors and **tilting cab** ensure easy maintenance, whether checking fluid levels or running routine checks and more. A **powerful air compressor comes standard for daily cleaning**. In addition, a **heavy**

duty kit can be installed to add an extra degree of air filtration and extend the life of the engine air filter.

The PT-300's efficient cooling system comes standard with a **radiator combined with anti-clogging fins** specially designed by FAE. It can also be integrated with reversible, proportional fans that ensure peak


performance and maximize radiator core cleanliness. In fact, the fans are regulated by the machine's control unit, adjusting the tilt of the blades according to the operating temperature. This optimizes airflow and also saves fuel.



Level control is simplified by an organized layout (1)




The **large rear doors** have safety catches (2)



Fluid level indicators are clear and easy to locate (3)



A **reversible fan** maximizes radiator efficiency (4)



Couplings make it possible to quickly **drain fluids** without leaks (5)



The **air compressor** makes daily cleaning easier



FORESTRY MULCHERS FOR SPECIAL VEHICLES

200/U/SONIC

Heavy duty hydraulic mulcher with Sonic technology.

The 200/U/SONIC combines compact maneuverability with the performance of larger machines. It is strong and highly productive for mulching bushes, branches and trees up to 35 cm in diameter.



Sonic System



Ø 35 cm max



FORESTRY MULCHERS FOR SPECIAL VEHICLES

300/U/SONIC

Heavy duty hydraulic mulcher with Sonic technology.


The 300/U/SONIC mulcher is highly productive, strong, and lightweight, with a fixed-teeth rotor that lets it mulch plants and trunks up to 40 cm in diameter. It may be customized to meet specific needs.



Sonic System



Ø 40 cm max

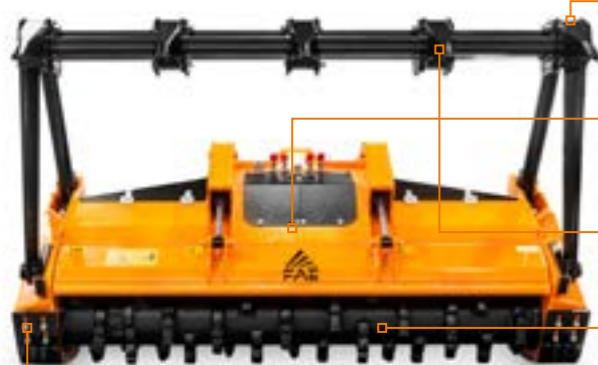


Mechanical or hydraulic push frame (optional)

Hydraulically controlled rear door
adjust final product size while machine is working size

Ripper teeth for the push frame (optional)

Possibility to have optional rotors and tooth

Adjustable skids

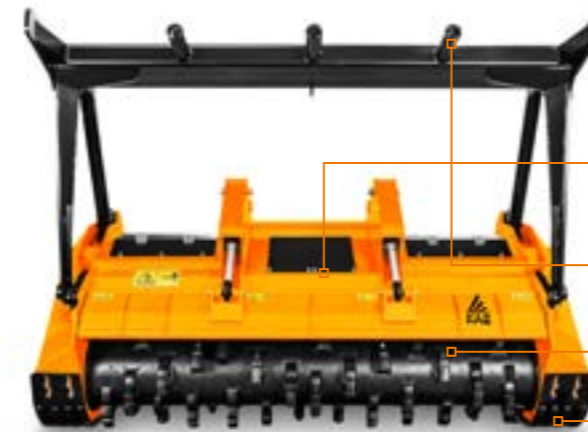

Mechanical or hydraulic push frame (optional)

Hydraulically controlled hood
to adjust final product size

Ripper teeth for push frame (optional)

Possibility to have optional rotors and tooth

Adjustable skids

MODEL	200/U/SONIC 200	200/U/SONIC 210	200/U/SONIC 225
Head type	Mulcher	Mulcher	Mulcher
Working width (mm)	2064	2150	2304
Total width (mm)	2464	2560	2704
Weight (kg)	2450	2550	2650
Rotor diameter (mm)	500	500	500
Max shredding diameter (mm)	350	350	350
No. teeth type C/3+C/3/SS	42+2	44+2	46+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MODEL	300/U/SONIC 200
Head type	Mulcher
Working width (mm)	2064
Total width (mm)	2544
Weight with C-type (kg)	3500
Weight with B-type (kg)	3780
Rotor diameter (mm)	590
Max shredding diameter (mm)	400
No. teeth type B/3 + C/3/SS	72+2
type C/3+C/3/SS	44+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE C



TOOTH C/3 (standard)



TOOTH C/3/HD (option)



TOOTH K/3 (option)



TOOTH STCL/3 (standard)



TOOTH C/3/SS (L/R) (side scraper)

ROTOR TYPE B



TOOTH B/3 (standard)



TOOTH B/3/HD (option)



TOOTH C/3 (standard)



TOOTH C/3/HD (option)



TOOTH K/3 (option)



TOOTH C/3/SS (L/R) (side scraper)

STUMP CUTTERS FOR SPECIAL VEHICLES

300/SC

Hydraulic stump cutters for higher horse power carriers.

The 300/SC can shred large stumps and roots up to 50 cm in diameter and 100 cm deep. The hydraulic and proportional swing control allows to work on wide surfaces without moving the vehicle.



Ø 50 cm max



Depth 100 cm



FORESTRY TILLERS FOR SPECIAL VEHICLES

200/S

Universal hydraulic tiller or higher horse power carriers.

The 200/S is lightweight and comes in different widths, making it perfect for a wide range of vehicles. The gear drive lets the rotor work at a slower speed than conventional belt-driven forestry mulchers.



Ø 30 cm max



Depth 30 cm



Hydraulic and proportional swing control

Hydraulic motor with relief valve

Poly Chain belt transmission
optimal power management

Interchangeable protection chains with safely deflects debris
limit the escape of the shredded material



Customized attachment plate (optional)

Hydraulically controlled hood
to adjust final product size

180 cc hydraulic motor

Dual transmission with side gearbox

MODEL	300/SC
Head type	Stump cutter
Working width max range (mm)	1450
Blade width (mm)	1050
Weight (kg)	2100
Disc rotor diameter (mm)	1020
Disc rotor width (mm)	160
Max working depth (mm)	1000
Max shredding diameter (mm)	500
No. teeth type M/1+M/2+M/3+M/4	24+4+24+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MODEL	200/S - 200	200/S - 225
Head type	Tiller	Tiller
Working width (mm)	2080	2320
Total width (mm)	2420	2662
Weight (kg)	2950	3162
Rotor diameter (mm)	590	590
Max working depth (mm)	300	300
Max shredding diameter (mm)	300	300
No. teeth type B/3+C/3/SS	74+4	82+4
type G/3+C/3/SS	74+4	82+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR DISC



TOOTH M/3
(standard)



TOOTH M/1
(standard)



TOOTH M/4
(standard)



TOOTH M/2
(standard)

ROTOR TYPE B



TOOTH B/3
(standard)



TOOTH B/3/HD
(option)



TOOTH G/3
(option)



TOOTH G/3/HD
(option)



TOOTH C/3/SS
(side scraper)


BLADE FOR SPECIAL VEHICLES

Dozer Blade

Eight-way dozer blade with heavy-duty structure and 2400 mm width. Designed for rough and finish grading in dirt and leveling, the FAE Dozer blade features interchangeable Hardox® wear-resistant cutting edges, a guarantee of resistance and reliability. Thanks to the hydraulic control of the movements, the blade can reach 15° of angle and 10° of side-tilt in both directions. The hydraulic system is equipped with relief valves to protect it from overload in the angle and side-tilt movements.




MOVEMENTS RANGE

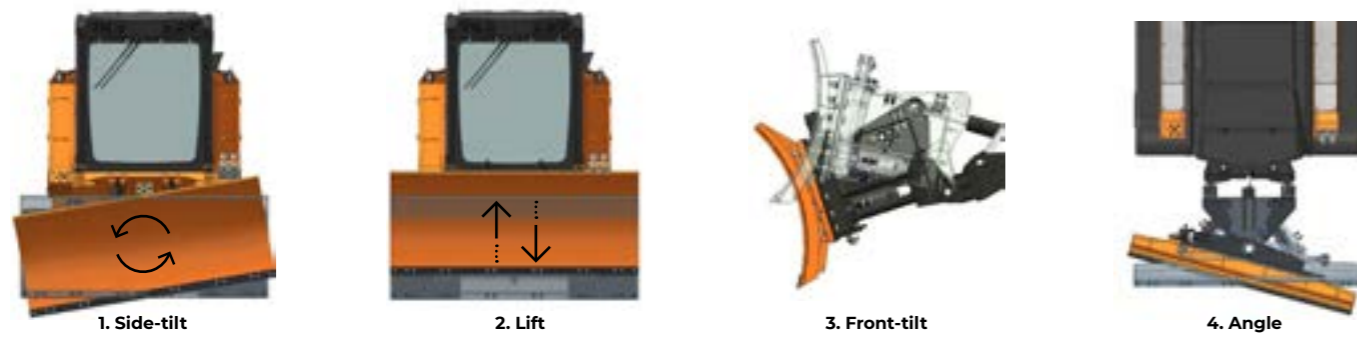

The 8-way movement allows side-tilting (1), lifting/lowering (2), front-tilting (3) and angle (4) the blade, all from the vehicle cabin or from the remote control.

TECHNICAL SPECIFICATIONS

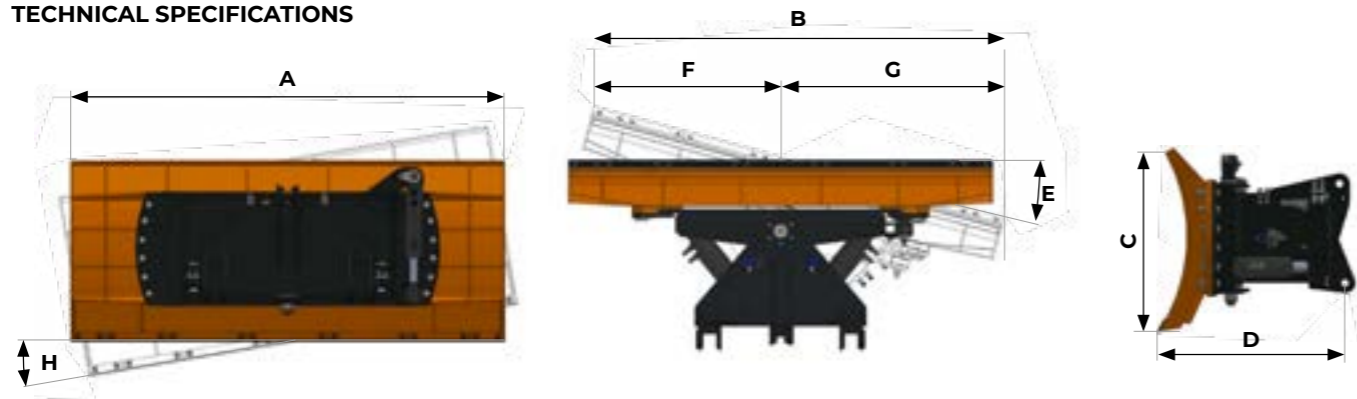

MODEL	Dozer Blade
A. Blade width (mm)	2400
B. Width fully angled (mm)	2320
C. Moldboard height (mm)	970
D. Overall length with attachment plate (mm)	1020
E. Blade angle	±15°
F. Center blade-left edge distance (when fully angled) (mm)	1055
G. Center blade-right edge distance (when fully angled) (mm)	1265
H. Blade side-tilt	±10°
Weight (kg)	1400
Moldboard thickness (mm)	15

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

PT-300

TECHNICAL SPECIFICATIONS.




275 hp | CAT ENGINE | TIER 3 / STAGE III A
302 hp | CAT ENGINE | TIER 4 FINAL / STAGE V

STANDARD EQUIPMENT

Engine CAT C7.1 Acert turbocharged and after-cooled	Ergonomic joysticks controls
After-treatment system DOC/DPF/SCR (PT-300 T4F)	Heating & Air conditioning systems
Hydrostatic tracks transmission	Double emergency exit and roof escape external access handle
Hydrostatic attachments transmission	Lexan® cabin windshields (full equipped 12 mm)
Oscillating style H-frame	Cabin air filtration dust proofing
Oscillating undercarriage	LCD color 7" display
660 mm steel tracks, single grouser, lubricated track chain, dozer-style rollers	MP3/CD bluetooth radio player
Combined aluminum cooler anti-clogging fins style	LED working lights
Cabin ROPS/FOPS/OPS-approved	Air compressor system
Comfort driver's seat (heated and air suspended)	Sonic system
Hydraulic control KIT for Winch and Guard frame	

DIMENSIONS

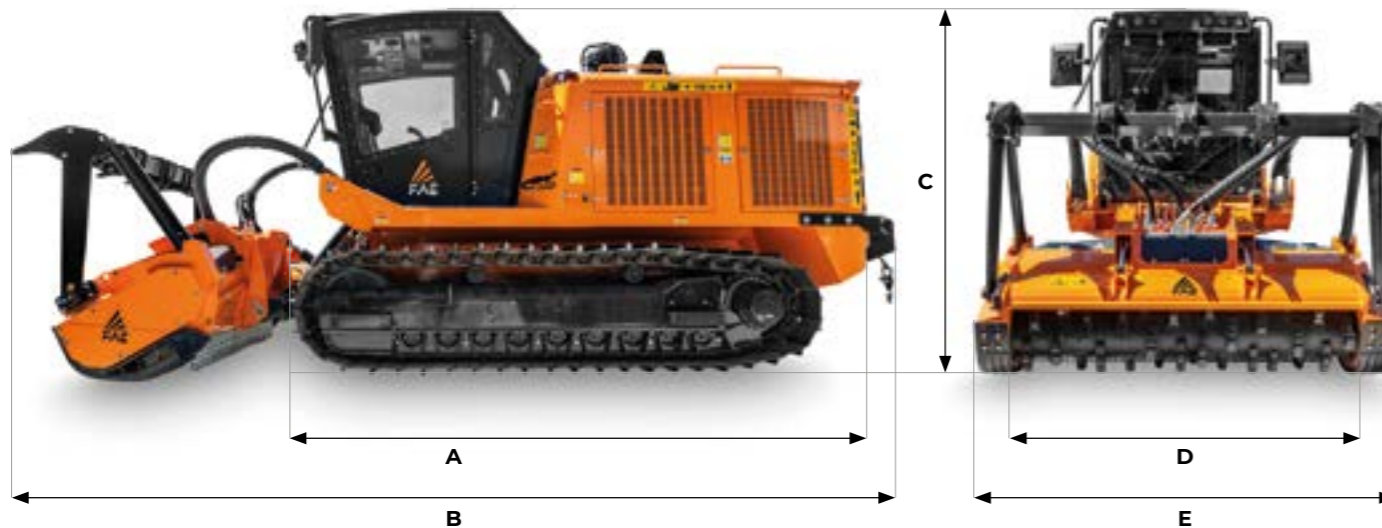

A Overall length without attachment	4950 mm	C Max height	2785 mm
B Transport length with 200/U/SONIC attachment on ground and winch	6900 mm	D Overall track width	2360 mm (with 660 mm pads)
		E See attachments table	

PT-300 III TIER 3A

PT-300 III TIER 4F

Engine Gross Power	275 hp	302 hp
Engine Emission	U.S. EPA Tier 3 / EU Stage III A	U.S. EPA Tier 4 Final / EU Stage V
Travel Pumps	2 - EP control - 78 cc - Danfoss	2 - EP control - 78 cc - Danfoss
Travel Motors	2 - HY control - 80 cc - Danfoss	2 - HY control - 80 cc - Danfoss
Max Travel Pressure	420 Bar	420 Bar
Attachment Pump	1 - EP control - 130 cc - Danfoss	1 - EP control - 147 cc - Danfoss
Max Mulcher Pressure	350 Bar	350 Bar
Hydraulic Oil Tank Capacity	320 L	320 L
Fuel Tank Capacity	340 L	340 L
DEF AdBlue® Tank	-	16 L
Track Chain	171 Pitch - Lubricated - Berco (std equipment with 660 mm pads)	171 Pitch - Lubricated - Berco (std equipment with 660 mm pads)
Lower Rollers	6 + 6 Single Flange + 3 + 3 Double Flange	6 + 6 Single Flange + 3 + 3 Double Flange
Carrier Rollers	2 + 2	2 + 2
Voltage	24 volt	24 volt
Max forward speed	6,5 Km/h	6,5 Km/h
Max reverse speed	6,5 Km/h	6,5 Km/h
Gradeability	45° vertical, 35° lateral	45° vertical, 35° lateral
Operating weight	11080 Kg (std equipment with 660 mm pads) 11680 Kg (std equipment with 800 mm pads DG)	11330 Kg (std equipment with 660 mm pads) 11930 Kg (std equipment with 800 mm pads DG)
Ground Pressure	0,28 Kg/cm² (std equipment / 800 mm pads DG / 200/U/SONIC 225)	0,29 Kg/cm² (std equipment / 800 mm pads DG / 200/U/SONIC 225)

ATTACHMENT

MODEL	200/U/SONIC 200	200/U/SONIC 210	200/U/SONIC 225	300/U/SONIC 200
Head type	Mulcher	Mulcher	Mulcher	Mulcher
Working width (mm)	2064	2150	2304	2064
Total width (mm)	2464	2560	2704	2544
Weight (kg)	2450	2550	2650	3400
Rotor diameter (mm)	500	500	500	590
Max shredding diameter (mm)	350	350	350	400
No. teeth type B/3 + C/3/SS	-	-	-	72+2
type C/3+C/3/SS	42+2	44+2	46+2	44+2

MODEL	200/S - 200	200/S - 225	300/SC
Head type	Tiller	Tiller	Stump cutter
Working width (mm)	2080	2320	-
Working width max range (mm)	-	-	1450
Total width (mm)	2420	2662	-
Blade width (mm)	-	-	1050
Weight (kg)	2950	3162	2100
Rotor diameter (mm)	590	590	1020 (Disc rotor)
Disc rotor width (mm)	-	-	160
Max working depth (mm)	300	300	1000
Max shredding diameter (mm)	300	300	500
No. teeth type B/3+C/3/SS	74+4	82+4	-
type M/1+M/2+M/3+M/4	-	-	24+4+24+4
type G/3+C/3/SS	74+4	82+4	-

TEETH

200/U/SONIC	300/U/SONIC	200/S	300/SC
ROTOR C	ROTOR C	ROTOR B	DISC ROTOR
C/3 (standard)	C/3 (standard)	B/3 (standard)	M/1 (standard)
C/3/HD (option)	C/3/HD (option)	B/3/HD (option)	M/2 (standard)
K/3 (option)	K/3 (option)	G/3 (option)	M/3 (standard)
STCL/3 (option)	STCL/3 (option)	G/3/HD (option)	M/4 (standard)
C/3/SS (side scraper)	C/3/SS (side scraper)	C/3/SS (side scraper)	

OPTIONS

OPTIONS

Rear winch - rated towing capacity: 6t	Chain guides
Canopy	Rock guards
Floating lift system	Proportional and reversible radiator fan
Cabin pressurization system	Ejector (heavy duty filtration package)
Protective windshield grill	Drainage filter (heavy duty filtration package)
Air-window cleaning system	Pre-heating system for engine and hydraulic oil
Rear view camera with additional LCD display (visibility package)	Air shut-off system
Additional lighting package (visibility package)	Automatic fire suppression system
Service light (service package)	Active Power Management Function
Oil top-off pump (service package)	Forestry protections kit (Cabin side windows protection grids + Engine bay doors protections)
800 mm steel track pads - single grouse	800 mm steel track pads - double grouse
H-frame conversion kit from oscillating to fix style	



Rear view camera with additional LCD display (visibility package)




Additional lighting package (visibility package)



Service light (service package)



Oil top-off pump (service package)

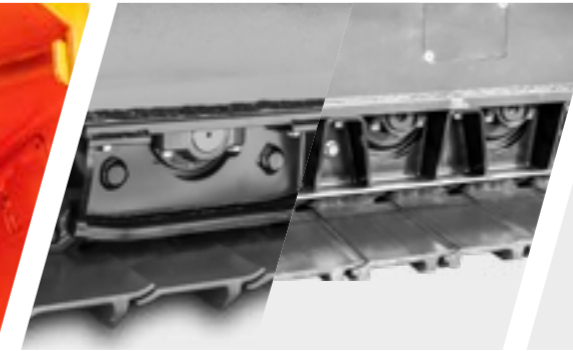

Chain guides - Rock guards



Forestry protections kit (Cabin side windows protection grids + Engine bay doors protections)




Rear winch - rated towing capacity: 6t



Canopy



Floating lift system

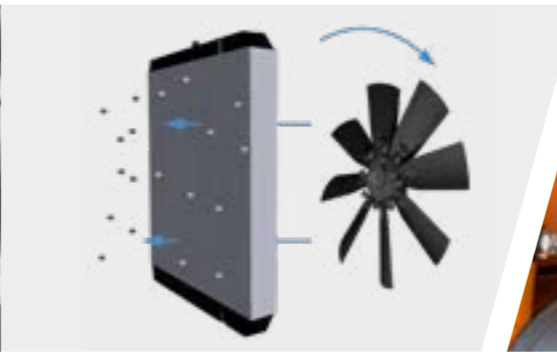

Proportional and reversible radiator fan



Ejector (heavy duty filtration package)



Drainage filter (heavy duty filtration package)



Cabin pressurization system



Protective windshield grill



Air-window cleaning system



Pre-heating system for engine and hydraulic oil



Air shut-off system



Automatic fire suppression system

FAE PT-475

THE TRACKED CARRIER FOR BIG CHALLENGES.

The FAE PT-475 is the perfect tracked carrier for major work in wooded areas and forests or along oil and gas pipelines. The sturdy construction with oscillating undercarriage can be equipped with forestry mulchers, stump cutters or the SFH/PM multitask head for crushing stone and tilling soil. The amazing power of the CAT C13 Acert straight-six engine lets you work on soft, uneven and swampy ground. The hydraulic system guarantees reliability and efficiency. The spacious cab is unrivaled when it comes to comfort, ergonomics and operator safety.

POWERFUL

The strength and reliability of the Caterpillar C13 six-cylinder engine. Supplies 475 hp in the Tier 4 Final/Stage V and Tier 3/Stage III A versions. Always top-notch performance supported by a global service network.

UNSTOPPABLE

Working on vast terrains with soft, uneven or swampy ground is the norm for the FAE PT-475. Longitudinal slopes of 45° and transverse slopes of 35°. High power and minimum ground pressure of 0.37 kg/cm².

TECHNOLOGICAL

High-tech body and soul. An integrated system developed by FAE to ensure maximum performance. With a network of sensors to monitor key operating parameters, everything in the PT-475 can be easily fine-tuned.

COMFORTABLE

Designed with total operator comfort in mind. ROPS/FOPS/OPS cabs - the industry benchmark. High Lexan™ windows. Ergonomic joysticks. Pneumatic seat. 7" color display to monitor and modify all operating functions.



VERSATILE

The FAE PT-475 is perfect for working in large woods or forests or along oil and gas pipelines. It can be paired with forestry mulchers, stump cutters or the SFH/PM multitask head for crushing stones and tilling soil. The SFH/PM head can also be combined with the floating function to ensure that the unit always follows the contours of the ground closely.

AN ENGINE THAT'S ALWAYS READY TO GO.

The **Caterpillar C13 Acert** six-cylinder engine in the FAE PT-475 guarantees strength, reliability and global support. Equipped with a turbocharger with after cooler and Acert technology, the Tier 4 Final/Stage V version of this engine delivers a full 475 hp. Efficient, powerful, with superb consumption/power ratio.

Compliance with the **Tier 4 Final/Stage V** standard is guaranteed with the combination of diesel particulate

filter (DPF), selective catalytic reduction (SCR) and diesel oxidation catalyst (DOC) technologies. The FAE PT-475 is also available in a **Tier 3/Stage III A** version for emission-free markets, rated at 475 hp.

The large, 12.5-liter displacement and a cooling system designed specifically for the FAE PT-475 ensure that both configurations offer peak performance in heavy-duty applications and when working in tropical climates.




Engine
Tier 4 Final / Stage V

The simple, uncluttered **internal layout** is synonymous of reliability



Optimized airflow for working in extreme conditions

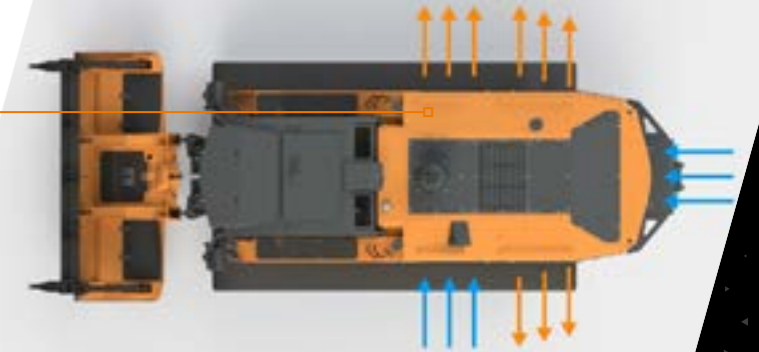

Easy access to **filters** makes maintenance quick and easy



EFFICIENT, RELIABLE TRANSMISSION.

The transmissions designed for the FAE PT-475 are based on two fundamental concepts: technology and integration. **Electronically-controlled pumps and sensors and a dedicated control unit**, working together to deliver maximum performance. The systems are designed to enable the CAT C13 Acert engine to operate at optimal rpms at all times.



The FAE PT-475's **hydrostatic transmission** also serves to dampen operating loads. This ensures that the carrier and its key components are subjected to less stress, reducing wear and tear. The end result is greater durability than a mechanical transmission.

The PT-475 can be equipped with **Active Power Management**, an intelligent FAE system that automatically manages vehicle advancement in relation to the force absorbed by the rotor. This feature also helps the machine automatically adapt to the contour of the terrain. The operator can now concentrate on the job at hand, for higher productivity.

An added benefit of the FAE PT-475's hydrostatic transmission is its ability to accommodate a **wide variety of FAE equipment**: forestry mulchers, stump cutters or the SFH/PM multitask head for crushing stone and tilling soil.



Diagram of the FAE PT-475 **hydrostatic transmission**: simple and effective

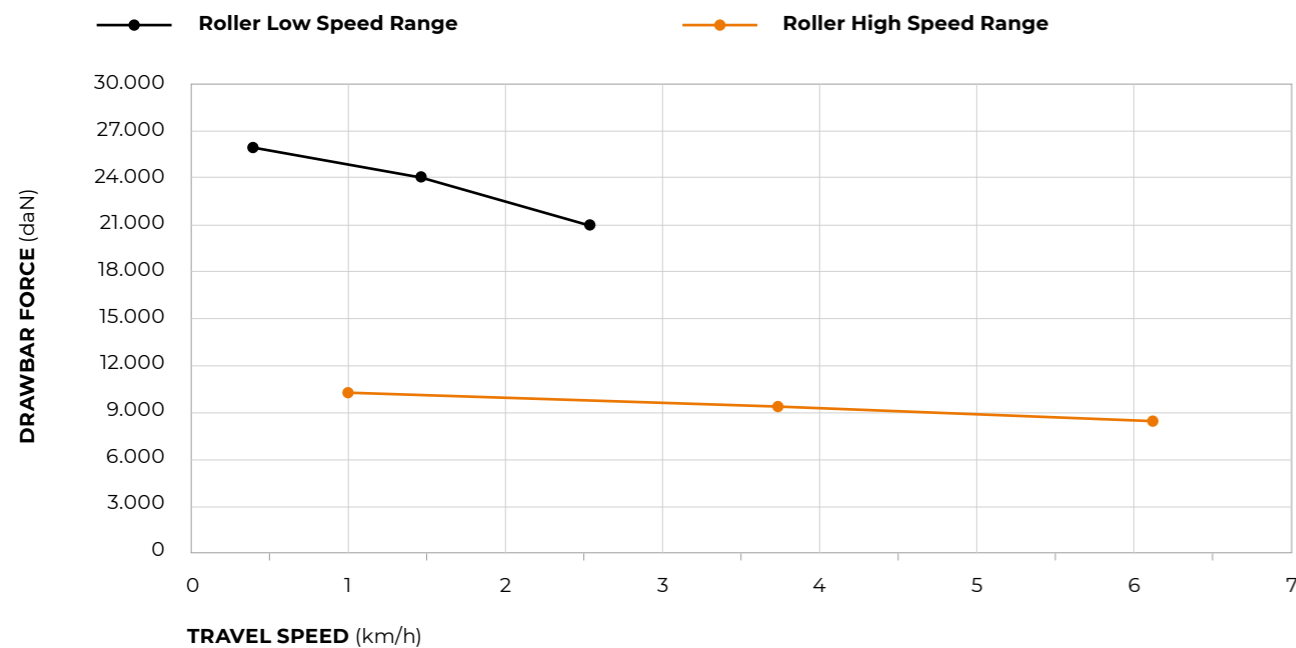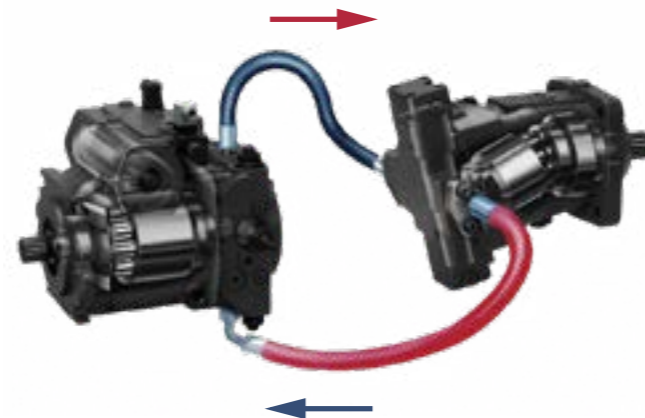

NOTE: Usable force will depend upon: machine weight, permitted traction, working duty cycle



- 1 Windshield wipers / Pneumatic cleaning system activation
- 2 High gear selector
- 3 Low gear selector
- 4 Variable gear speed increase / decrease
- 5 Horn

The traction force can be controlled precisely and safely with the **trackball on the joystick**


HEAVY DUTY UNDERCARRIAGE.

The FAE PT-475 undercarriage is designed to provide maximum operating performance and reliability, even in the most demanding conditions.


Prime quality **Berco components**. Chains with lifetime lubrication offer longer life than conventional chains as well as greater operator comfort. Solid, reliable dozer-type rollers. Oscillating undercarriage technology for superior traction and comfort. Two options available for roller guards to better adapt to different working environments.

Conventional geometry ensures a **low center of gravity** and provides **optimal contact between chain and drive wheel**. Two fundamental elements for the best possible work, even on slopes. The FAE PT-475 wheelbase also extends the area over which the load is distributed, which means **lower specific pressure against the ground**.

The frames of the PT-475 undercarriage are designed to withstand major stresses and make maintenance easier.

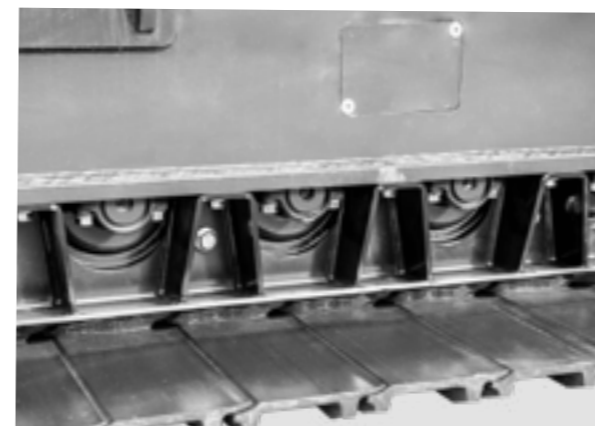

Solid **rock guards**

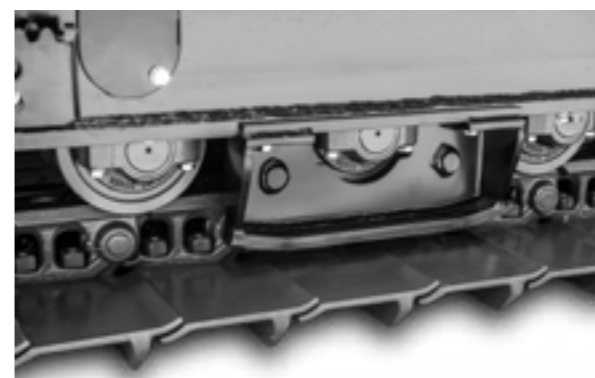

Chain **guide**

3 **slide** configurations to adapt to any terrain



Single grouser - **810 mm (Option)**



Single grouser - **600 mm (Standard)**



Oscillating **undercarriage technology** boosts grip and comfort

A SERIOUSLY COMFORTABLE CAB.

The cab of the FAE PT-475 is designed for those who work in extreme conditions. It is ergonomic, soundproof and guarantees optimal visibility, making it an industry benchmark.

Joysticks built into the pneumatic suspension seat allow for easy, precise operation of the PT-475. The controls on the side console are distributed to make them user friendly, and the 7" color display keeps the essential carrier parameters in view at all times.

ROPS/FOPS/OPS certification meets the highest standards of operator safety, even in the most demanding applications. The air conditioning system vents located throughout the cabin provide all the comfort the operator needs, in hot or cold weather. An optional **cabin pressurization system** is also available.

The large, 12-mm thick, impact and scratch-resistant **Lexan™ windows** provide excellent visibility. Powerful LED work lights offer broad coverage, ensuring precise, safe work in all conditions.



7" electronic color **display**



User-friendly side **console**



Powerful **air conditioning system**



Optional **rear view camera**



Each and every item in the cabin has been carefully **designed with ergonomics in mind.**

EASY TO USE, EASY TO MAINTAIN.

Everything about the FAE PT-475 is designed to be effortless, from operation to maintenance.

Large doors with shock-resistant closures make accessing the engine compartment easy. The compartment is also protected by micro-perforated plates that prevent material from getting inside.

Accessing the filters, tanks and hydraulic system components is easier with the large engine compartment and its organized interior layout. The large doors and **tilting cab** ensure easy maintenance, whether checking fluid levels or running routine checks and more. A **powerful air compressor comes standard for daily cleaning**. In addition,

a **heavy duty kit** can be installed for an extra degree of air filtration and boosting the life of the engine air filter.

The PT-475's efficient cooling system comes standard with a **dedicated diesel engine radiator and a second radiator for the hydraulic system**, built into the door to provide easy access to the engine compartment. Both

radiators feature anti-clogging fins specially designed by FAE. It can also be integrated with reversible, proportional fans that ensure peak performance and maximize radiator core cleanliness. In fact, the fans are regulated by the machine's control unit, adjusting the tilt of the blades according to the operating temperature. This optimizes airflow and also saves fuel.




Level control is simplified by an organized layout (1)




The **large rear doors** have safety catches (2)



Fluid level indicators are clear and easy to locate (3)



A **reversible fan** maximizes radiator efficiency (4)



Couplings make it possible to quickly **drain fluids** without leaks (5)



The **air compressor** makes daily cleaning easier



FORESTRY MULCHERS FOR SPECIAL VEHICLES

300/U

Heavy duty hydraulic mulcher.

The 300/U mulcher is highly productive, strong, and lightweight, with a fixed-teeth rotor that lets it mulch plants and trunks up to 40 cm in diameter. It may be customized to meet specific needs.



Ø 40 cm max



FORESTRY MULCHERS FOR SPECIAL VEHICLES

500/U

Heavy duty hydraulic mulcher.

The 500/U forestry mulcher is the top of the line for special vehicles, capable of mulching logs up to 50 cm in diameter. The transmission is rated for use up to 600 hp, so it can work with the most powerful vehicles on the market.



Ø 50 cm max



Mechanical or hydraulic push frame (optional)

Customized attachment plates

Hydraulically controlled hood
to adjust final product size

Ripper teeth on hydraulic hood (optional)

Multiple tooth options

Adjustable skids

Customized hydraulic transmission



Mechanical or hydraulic push frame (optional)

Customized attachment plates

Hydraulically controlled hood
to adjust final product

Ripper teeth on hydraulic hood (optional)

Multiple tooth options

Adjustable skids

Customized hydraulic transmission

MODEL	300/U 225	300/U 250
Head type	Mulcher	Mulcher
Working width (mm)	2304	2544
Total width (mm)	2784	3024
Weight (kg)	3900	4100
Rotor diameter (mm)	590	590
Max shredding diameter (mm)	400	400
No. teeth type B/3 + C/3/SS	80+2	92+2
type C/3+C/3/SS	50+2	56+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MODEL	500/U 225	500/U 250
Head type	Mulcher	Mulcher
Working width (mm)	2320	2560
Total width (mm)	2860	3100
Weight (kg)	4710	4960
Rotor diameter (mm)	680	680
Max shredding diameter (mm)	500	500
No. teeth type A/3+MH	88+2	96+2
type C/3+C/3/SS	54+2	60+2

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE B



TOOTH B/3 (standard)
TOOTH B/3/HD (option)

ROTOR TYPE C



TOOTH C/3 (standard)
TOOTH C/3/HD (option)
TOOTH K/3 (option)



TOOTH C/3/SS (L/R)
(side scraper)

ROTOR TYPE A



TOOTH A/3 (standard)
TOOTH A/3/HD (option)
TOOTH MH (side scraper)

ROTOR TYPE C



TOOTH C/3 (standard)
TOOTH C/3/HD (option)
TOOTH K/3 (option)
TOOTH C/3/SS (L/R)
(side scraper)



MULTITASKS FOR SPECIAL VEHICLES

SFH/PM

Stone crusher, forestry tiller and mulcher.

The SFH/PM head works with special vehicles up to 450 hp. It shreds logs or stumps and crushes stones up to 40 cm deep. Its double-gear transmission increases shredding power.



Ø 35 cm max (stones)
Ø 45 cm max (trees)
Ø 55 cm max (stump)



Depth 40 cm



STUMP CUTTERS FOR SPECIAL VEHICLES

500/SC

Hydraulic stump cutters.

The 500/SC can shred large stumps and roots up to 60 cm in diameter and 105 cm deep. The hydraulic and proportional swing control allows to work on wide surfaces without moving the vehicle.



Ø 60 cm max



Depth 105 cm



Customized attachment plate (optional)

Hydraulically controlled hood to adjust final product

Dual transmission with side gearbox converts RPM to Power



Hydraulic motor with relief valve

Hydraulic and proportional swing control

Poly Chain belt transmission optimal power management

Interchangeable protection chains with safely deflects debris limit the escape of the shredded material

MODEL	SFH/PM 225	SFH/PM 250
Head type	Multitask	Multitask
Working width (mm)	2320	2560
Total width (mm)	2710	2950
Weight (kg)	5700	6000
Rotor diameter (mm)	900	900
Max working depth (mm)	400	400
Max shredding diameter stones (mm)	350	350
trees (mm)	450	450
stump (mm)	550	550
No. teeth type G/3 - STC/FP - STC/3/FP	60+6+4	66+6+4

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

MODEL	500/SC
Head type	Stump cutter
Working width max range (mm)	1570
Blade width (mm)	1050
Weight (kg)	3300
Disc rotor diameter (mm)	1200
Disc rotor width (mm)	167
Max working depth (mm)	1050
Max shredding diameter (mm)	600
No. teeth type M/1+M/2+M/3+M/4	30+10+30+10

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE G



TOOTH G/3 (standard)



TOOTH G/3/HD (option)



TOOTH STC/3/FP (side scraper)



TOOTH STC/FP (side scraper)

ROTOR DISC



TOOTH M/3 (standard)



TOOTH M/1 (standard)



TOOTH M/4 (standard)



TOOTH M/2 (standard)

PT-475

TECHNICAL SPECIFICATIONS.




475 hp | TIER 4 FINAL / STAGE V
TIER 3 / STAGE III A

STANDARD EQUIPMENT

After-treatment system DOC/DPF/SCR	Comfort driver's seat (heated and air suspended)
Engine CAT C13 Acert turbocharged and after-cooled	Ergonomic joysticks controls
Hydrostatic tracks transmission	Heating & Air conditioning systems
Hydrostatic attachments transmission	Lexan® cabin windshields (full equipped 12 mm)
H-frame with fixed pin attach system	Cabin air filtration dust proofing
Oscillating undercarriage	LCD color 7" display
600 mm steel track pads, single grouser, lubricated track chain, dozer-style rollers	MP3/CD bluetooth radio player
Engine aluminum cooler anti-clogging fins style	LED working lights
Hydraulic Oil aluminum cooler anti-clogging fins style	Air compressor system
Cabin ROPS/FOPS/OPS-approved	Air Shut Off Valve

DIMENSIONS

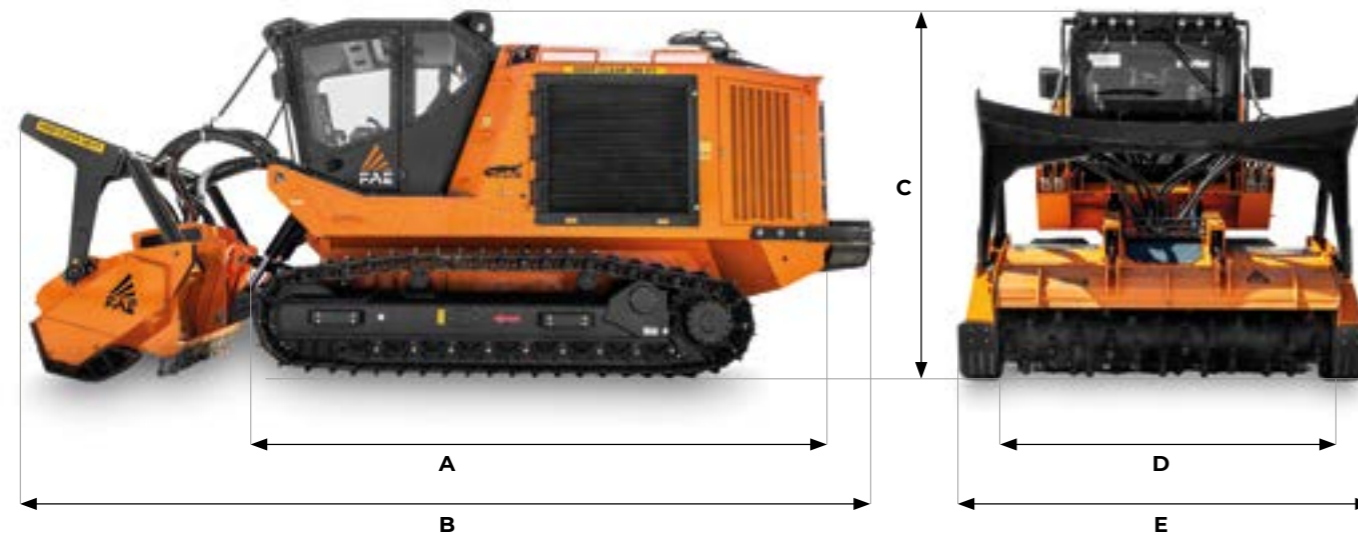

A Overall length without attachment	5860 mm	C Max height	3300 mm
B Transport length with 300(U attachment on ground and winch	8200 mm	D Overall track width	2550 mm (with 600 mm pads)
		E See attachments table	

PT-475 T3A

PT-475 T4F

Engine Gross Power	475 hp	475 hp
Engine Emission	U.S. EPA Tier 3 / EU Stage III A	U.S. EPA Tier 4 Final / EU Stage V
Travel Pumps	2 - EP control - 100 cc - Danfoss	2 - EP control - 100 cc - Danfoss
Travel Motors	2 - HY control - 160 cc - Danfoss	2 - HY control - 160 cc - Danfoss
Max Travel Pressure	420 Bar	420 Bar
Attachment Pump	2 - EP control - 130 cc - Danfoss	2 - EP control - 130 cc - Danfoss
Max Mulcher Pressure	350 Bar	350 Bar
Hydraulic Oil Tank Capacity	480 L	480 L
Fuel Tank Capacity	790 L	790 L
DEF AdBlue® Tank	-	35 L
Track Chain	190 Pitch - Lubricated - Berco (std equipment with 600 mm pads)	190 Pitch - Lubricated - Berco (std equipment with 600 mm pads)
Lower Rollers	6 + 6 Single Flange + 3 + 3 Double Flange	6 + 6 Single Flange + 3 + 3 Double Flange
Carrier Rollers	2 + 2	2 + 2
Voltage	24 volt	24 volt
Max forward speed	6 Km/h	6 Km/h
Max reverse speed	6 Km/h	6 Km/h
Gradeability	45° vertical, 35° lateral	45° vertical, 35° lateral
Operating weight	19900 Kg (std equipment with 600 mm pads) 20500 Kg (std equipment with 810 mm pads)	20400 Kg (std equipment with 600 mm pads) 21000 Kg (std equipment with 810 mm pads)
Ground Pressure	0,40 Kg/cm² (std equipment / 810 mm pads / 300/U-250)	0,41 Kg/cm² (std equipment / 810 mm pads / 300/U-250)

ATTACHMENT

MODEL	300/U 225	300/U 250	500/U 225	500/U 250
Head type	Mulcher	Mulcher	Mulcher	Mulcher
Working width (mm)	2304	2544	2320	2560
Total width (mm)	2784	3024	2860	3100
Weight (kg)	3900	4100	4710	4960
Rotor diameter (mm)	590	590	680	680
Max shredding diameter (mm)	400	400	500	500
No. teeth type A/3+MH	-	-	88+2	96+2
type B/3 + C/3/SS	80+2	92+2	-	-
type C/3+C/3/SS	50+2	56+2	54+2	60+2
type M/1+M/2+M/3+M/4	-	-	-	-

MODEL	SFH/PM 225	SFH/PM 250	500/SC
Head type	Multitask	Multitask	Stump cutter
Working width (mm)	2320	2560	-
Working width max range (mm)	-	-	1570
Total width (mm)	2710	2950	-
Blade width (mm)	-	-	1050
Weight (kg)	5700	6000	3300
Rotor diameter (mm)	900	900	1200 (Disc Rotor)
Disc rotor width (mm)	-	-	167
Max working depth (mm)	400	400	1050
Max shredding diameter stones (mm)	350	350	600
trees (mm)	450	450	-
stump (mm)	550	550	-
No. teeth type G/3 - STC/FP - STC/3/FP	60+6+4	66+6+2	-
No. teeth type M/1+M/2+M/3+M/4	-	-	30+10+30+10

TEETH

300/U				500/U		SFH/PM	
ROTOR C	ROTOR G	ROTOR STONES RESISTANT	ROTOR B	ROTOR C	ROTOR STONES RESISTANT	ROTOR A	ROTOR G
C/3 (standard)	G/3 (standard)	STC/3 (standard)	B/3 (standard)	C/3 (standard)	STC/3 (standard)	A/3 (standard)	G/3 (standard)
C/3/HD (option)	G/3/HD (option)	STC/3/HD (option)	B/3/HD (option)	C/3/HD (option)	STC/3/HD (option)	A/3/HD (standard)	G/3/HD (option)
K/3 (option)		STC/3/FP (option)		K/3 (option)	STC/3/FP (option)		
STCL/3 (option)				STCL/3 (option)			
C/3/SS (side scraper)	STC/3/HD (side scraper)	STC/3/FP (side scraper)	C/3/SS (side scraper)	C/3/SS (side scraper)	STC/3/FP (side scraper)	MH (side scraper)	STC/3/FP - STC/FP (side scraper)

OPTIONS

OPTIONS


Rear winch - rated towing capacity: 13 t	Chain guides
Cabin pressurization system	Rock guards
Protective windshield grill	Proportional and reversible radiator fan
Air-window cleaning system	Ejector (heavy duty filtration package)
Rear view camera with additional LCD display (visibility package)	Pre-heating system for engine and hydraulic oil
Additional lighting package (visibility package)	Air shut-off system
Service light (service package)	Automatic fire suppression system
Oil top-off pump (service package)	Active Power Management Function
810 mm steel track pads - single grouse	




Service light (service package)




Oil top-off pump (service package)

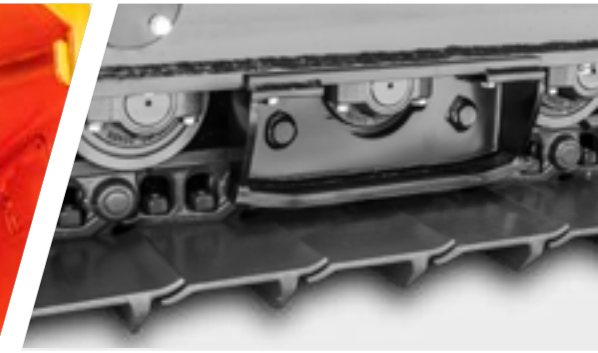

Chain guides

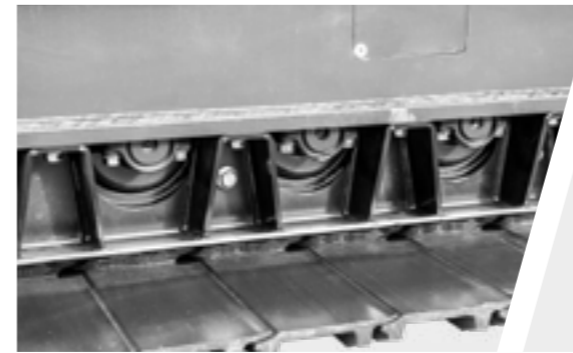

Rock guards

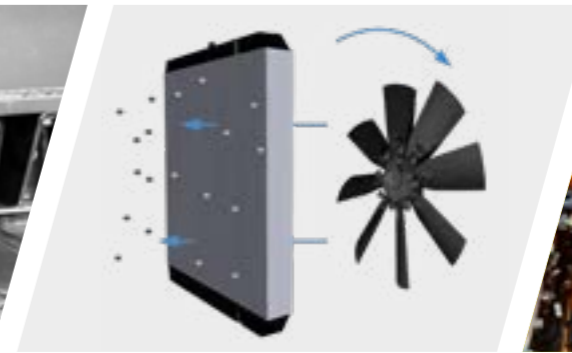

Proportional and reversible radiator fan



Ejector (heavy duty filtration package)



Rear winch - rated towing capacity: 13t




Cabin pressurization system



Protective windshield grill



Pre-heating system for engine and hydraulic oil

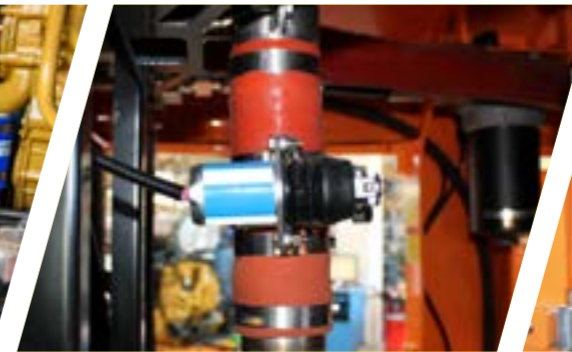

Air shut-off system



Automatic fire suppression system



Air-window cleaning system



Rear view camera with additional LCD display (visibility package)



Additional lighting package (visibility package)



810 mm steel track pads - single grouse

RIGHT TO THE HEART OF THE POWER

The spiral rotor design reduces the power requirement



MORE CONSISTENT FINAL PRODUCT SIZING



LESS FUEL CONSUMPTION



HIGHER PRODUCTIVITY

1 / Forestry rotor type C/3



1

2 / Forestry rotor type A/3



2

3 / Forestry rotor type B/3




3

4 / Rotore forestale / stone resistant



4

5 / Rotor Bite Limiter

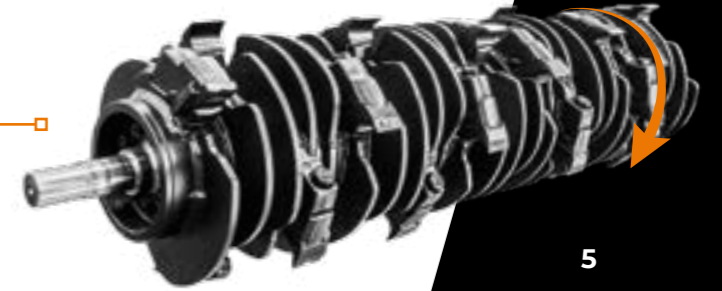


5

6 / Disc stump cutter



6

7 / Rotor type G

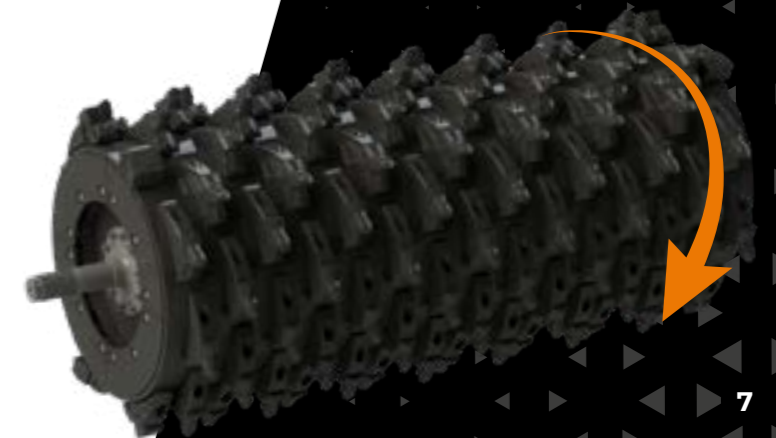

7

